

SUN-CLH-115W1A1Y




Note : The Letter Y in P/N stands for Lamp base type
 "-E" for E39 lamp base
 "-EX" for EX39 lamp base



Advantage:

- UL certificate
- PHILIPS LUMILEDS chip, high CRI.
- 90°*150 degree, TYPE III.
- Internal driver, input voltage AC100-277V.
- E39, EX39 lamp base. Single SUNON fan.
- Lamp Base: 270 degree rotated.
- Automatically Power-Reducing Function: Power reduces gradually when driver's temperature reaches 50°C. When the heat sink of led reaches 90°C, there will no power reduction any more. And power will reduce to 65% of the origin.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide, easy Installation.
- Fits many different fixtures to replace traditional lamps.

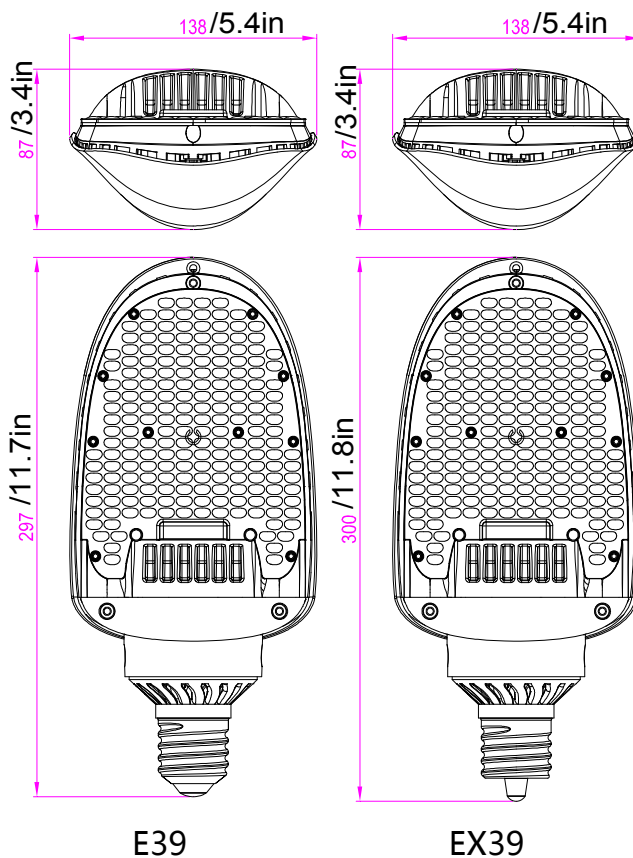

Application:

LED Retrofit Kit make it simple to replace: parking lot lighting, shoebox lighting, street lighting, flood lighting, wall pack lighting, and canopy lighting etc.

Specifications

PRODUCT SPECIFICATIONS		
Product name	LED Retrofit Kit	
Part No	SUN-CLH-115W1A1-E	SUN-CLH-115W1A1-EX
Lamp Base	E39	EX39
Dimension	297*138*87mm/11.7*5.4*3.4in	300*138*87mm/11.8*5.4*3.4in
Technical Characteristic		
Color temperature	2700-6500K	
CRI	> 70	
Lumens	13000-15000 LM	
Lumen Efficacy	115-130 LM/W	
Input Power	115W	
Viewing Angle	90*150degree(TypeⅢ)	
Input Voltage	AC100-277V 50/60Hz	
PFC	>0.9	
Equivalent	200W CFL , 400W MHL/HPS/HID	
Waterproof Rating	IP51	
MATERIALS		
LED Brand	PHILIPS LUMILEDS	
LED Type	LUXEON 3030 2D (1.5W)	
LED QTY	196 PCS	
Housing	Magnesium Alloy+AL+PC	
Housing color	Black+Silver	
OTHERS		
Operating Temperature	-20℃ ~ 45℃ / -4°F ~ 113°F	
Operating Humidity	20%-90% RH	
Storage Temperature	-30℃ ~ 80℃ / -22°F ~ 176°F	
Storage Humidity	10%-75% RH	
Application	Shoeboxes, streetlights, floodlights, wall packs, and canopies	
Certification	UL	
Warranty	5 Years	

Photometrics

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 118.01 lm/W
MODEL	SUN-CLH-115W1A1	I _{max} (cd)	4550	η street_up (%)	0.0	
NOMINAL POWER (W)	115	LOR (%)	100.0	η street_down (%)	65.1	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	13140	η house_up (%)	0.0	
NOMINAL FLUX (lm)	13139.9	MAXIMUM @ (C, γ)	105,31.0	η house_down (%)	34.9	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.05000	
TEST VOLTAGE (V)	120	η down (%)	100.0	SLI	22.988	

