

 SUN38-20W/40W/60W

20W
40W
60W



Specifications

Model No.	Power	led Qty	PF	CRI	Voltage	CCT	Lumen	Size Unit in	Operation temp (°C/°F)	Weight	Certificate	Equal to
SUN38	20W	96leds 2835	≥0.9	≥80	100-277VAC 50~60Hz	2700-6500K	3000±200lm	E26Φ 3.6x5.2	minus 40~60°C	NW 1.0lbs	cUL/UL LM79	100W HPS MHL
								E39 Φ 3.6x5.8	minus 40~140°F			
								E39Φ 3.6x5.8				
SUN38	40W	192leds 2835	≥0.9	≥80	100-277VAC 50~60Hz	2700-6500K	6000±200lm	E26 Φ 3.6x7.8	minus 40~60°C	NW 1.7lbs	cUL/UL LM79	200W HPS MHL
								E39 Φ 3.6x8.5	minus 40~140°F			
								E39Φ 3.6x8.5				
SUN38	60W	294leds 2835	≥0.9	≥80	100-277VAC 50~60Hz	2700-6500K	9000±200lm	E26Φ3.6x10.0	minus 40~60°C	NW 2.2lbs	cUL/UL LM79	250W HPS MHL
								E39Φ3.6x10.7	minus 40~140°F			
								E39Φ3.6x10.7				

Features

2835 150lm/W




350 degree twistable



Flame retardant material



180 degree beam angle



Application



Wall pack



Shoe box



Canopy



Low bay



Area light



Cobra Head



Before




After




Installation

Lamp Installation

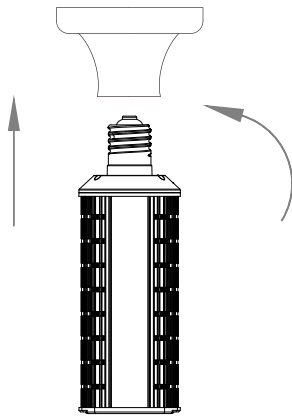


Step:1

Shown as Figure 1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner.
(North America 100-277VAC)

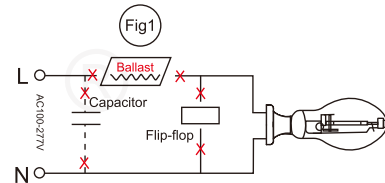


Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder.
(North America 100-277VAC)

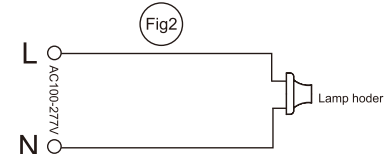

Step:3

Shown as Figure 3
Install new LED replacement lamp. Please make sure the old fitting is correctly earth.
(North America 100-277VAC)

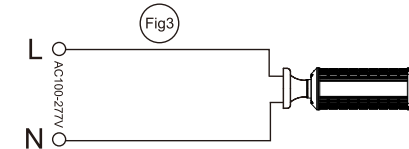

Support Stand Installation

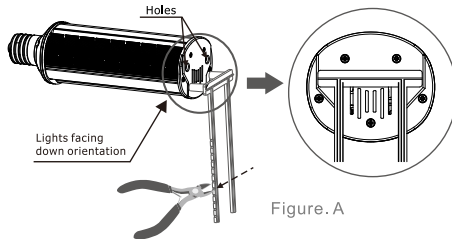


Figure. A

Instructions for two legs stand (shown as figure A):

- Step 1: Screw the lamp onto the socket tightly, then adjust the lamp slightly, make the LEDs side of lamp facing down orientation.
- Step 2: Fix the two legs acrylic stand onto the bottom of the lamp.
- Step 3: Cut off the excess part of the stand.

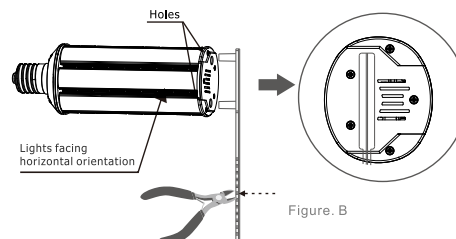


Figure. B

Instructions for one leg stand (shown as figure B):

- Step 1: Screw the lamp onto the socket tightly, then adjust the lamp slightly, make the LEDs side of lamp facing horizontal orientation.
- Step 2: Fix the one leg acrylic stand onto the bottom of the lamp.
- Step 3: Cut off the excess part of the stand.