



Applications:

Perfect for security, entry ways, stairways, storage and perimeter areas, as well as residential exteriors.

Features

- Sealed die-casting pro le for outdoor applications.
- Consume only 15W, perfect replacement for the standard 120 Watts metal halide and high pressure sodium fixtures, light up constantly for over 50,000 hours
- 120VAC photocell included for great energy-saving.
- Die-casting housing for an excellent cooling system and anti-corrosion, UV-stabilized polycarbonate frosted lens for anti-glare design.
- Supports direct wall mounting and J-box mounting, with 1/2 inch entry at the bottom.
- Operating temperature is -40°C to 50°C (-40°F to 122°F).
- UL/cUL wet location and DLC qualified.



PERFORMANCE DATA


			5000K	
Wattage	Voltage	CRI	Lumes	LPW
15W	120VAC	80	1600lm	107lm/w

ELECTRICAL DATA

Number Of Drivers	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	15	120	0.13

DIMENSION


unit: inch/mm

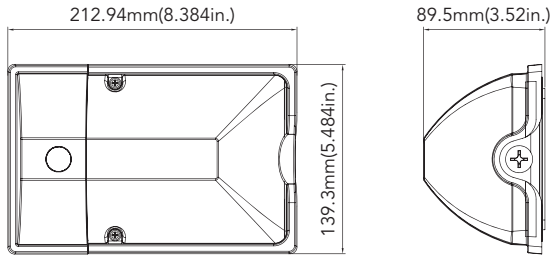

Weight: 1.87lb

PHOTOMETRICS

15W

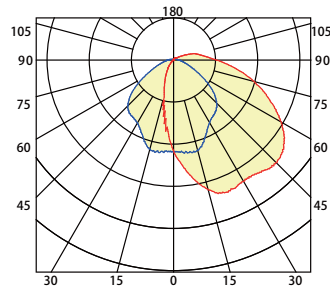

ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Finish	Photoce (Option)	Lens
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WM Wall Mount Series	15 15W	12V 120V	50K 5000K	D Dark Bronze	P1 120V Photocell	F Frosted Lens

Note: 1. There is only frosted lens available for 15W.