

LED EXPLOSION PROOF LIGHT EXPERT

ECOMAX

LIGHTING




Model H4


Series H
Rated Power: 20-60W
Input: 100-277VAC/200-480VAC

Rating and protection level

INGRESS PROTECTION: IP66
UL844/UL1598/1598A
Class I Div.2, Groups A, B, C, D
Class II Div.1, Groups E, F, G
Class II Div.2, Groups F, G
Class III

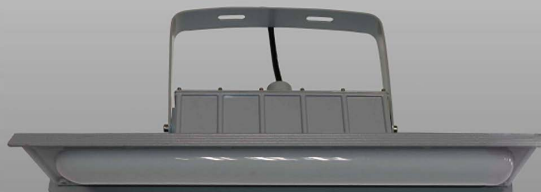

Model H2 available



0 ~180 degree adjustable installation

Series H Specification



Explosion Proof

LED Linear Light



Materials

- ★ Housing: Die-casting aluminum
- ★ Diffuser: PC
- ★ Bolts: Stainless steel
- ★ Mounting Bracket: Stainless steel

Explosion Protection

Marking UL844 (North American) Class I, Division 2, Groups A, B, C, D
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III

Marking Marine UL 1598A

Other Rating IP 66

Applications

Oil and Gas industry

- ★ All petroleum production and refining
- ★ Petroleum loading and transportation
- ★ Petroleum storage and retail
- ★ LNG industry
- ★ All mining operations and service

Chemical industry

- ★ All types of painting facilities
- ★ Chemical production and storage

Ocean, marine and aerospace field

- ★ Ocean platform operation facilities and structure
- ★ Aerospace clean room and production
- ★ Ocean vessel operations

Metal treatment

- ★ Steel and aluminum factories
- ★ Pumping stations in any environment
- ★ Metal smelting, foundry and manufacturing

Food and alcohol industry

- ★ Flour and fine particle production and storage
- ★ Food and distilling production
- ★ Alcohol industry

Other high humidity, dust, high temperature, vapor locations

Basic Data

Part Number	Wattage	CCT	Voltage Options	Lumens	Warranty	CRI	Emergency Time(Optional)
EX-10W H2YZDA	10	2700K-7000K	AC: 100 - 277V <input type="checkbox"/> AC: 200 - 480V <input type="checkbox"/> DC: 12 - 36V <input type="checkbox"/>	1400	5 years	70+	3 hours
EX-20W H2YZDA	20			2800			
EX-30W H2YZDA	30			4200			
EX-40W H4YZDA	40			5600			
EX-50W H4YZDA	50			7000			
EX-60W H4YZDA	60			8400			

"H2, H4"=Product code; "Y"=D or N: Dimmable or Non-dimmable; "Z"=CCT, from 2700~7000K; "D"=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°; A for glass info., blank for flat glass, C spherical glass.

Series H Specification

Key Features


- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- High energy efficiency.
- 2 versions with different size.

Value-Added Features


- 10kv surge protection.
- Up to ten years limited warranty option.
- Emergency Battery back up(Option).
- Working temperature can be more than 85°C.
- Various installation ways for different applications.
- Polycarbonate diffuser to make wider beam angle.
- Customized motion sensor(Option).
- Advanced smart system options: WIFI & BLUE-TOOTH(Option).

Mechanical Structure

Unit: mm or inch

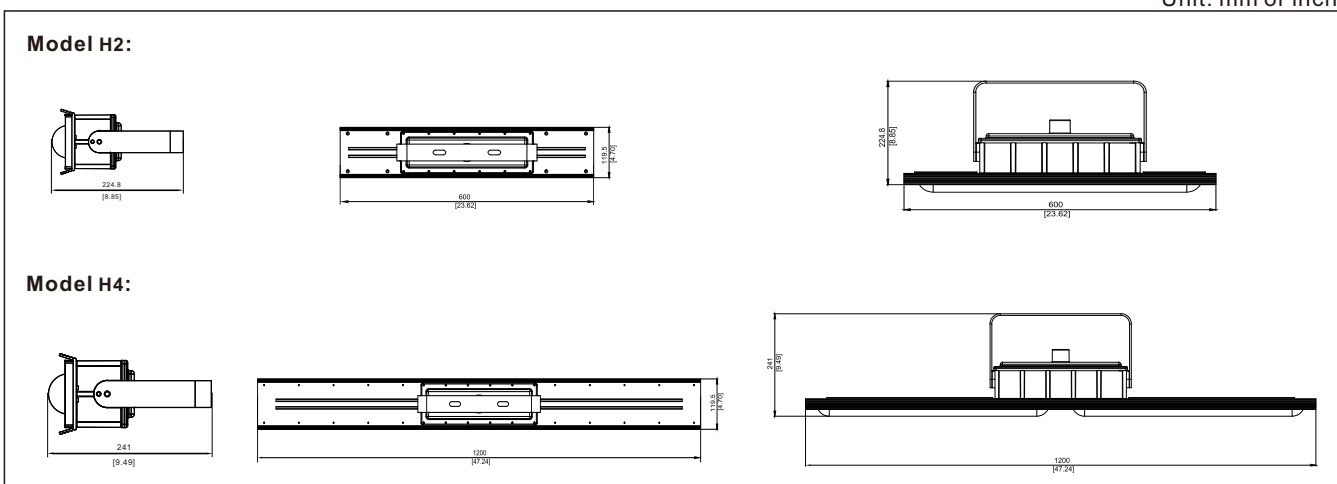

Lighting Distribution

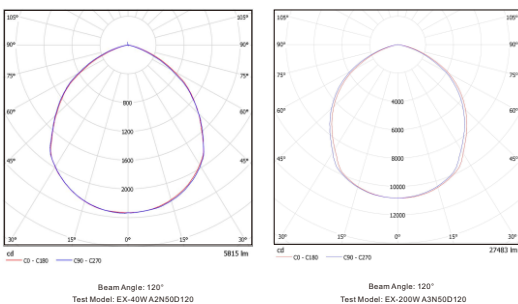

Installation Manual

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLATION. KEEP THE INSTRUCTIONS FOR FUTURE REFERENCE. Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDOUS INVOLVED.

Warning: Risk of fire or electric shock. Linear light installation requires knowledge of luminaires and electrical systems. DO NOT open the enclosure when energized. DO NOT try to install if not qualified. Please contact a professional electrician.

Warning: Risk of fire or electric shock. Suitable for wet locations. Make sure the power is off prior to installation.

Warning: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.


Warning: DO NOT install in unstable, loose or breakable surfaces.

Warning: DO NOT let objects impact or exert force on the surface of the fixture.


Bracket Mounting



⚠ WARNING
 Risk of fire, Electric shock or personal injury
 Please turn off power before installation!

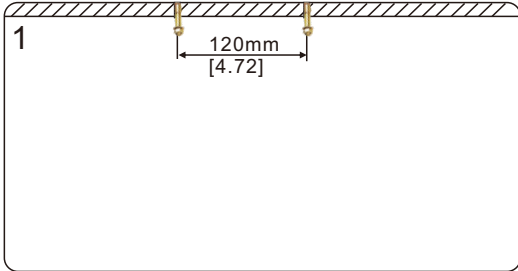


1. Drill 2x Ø10 holes for expanded screws, and then fix them to the ceiling.

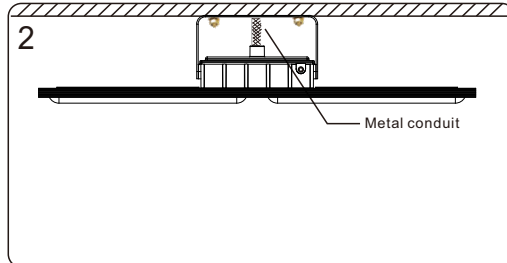


2. Install the fixture to the expanded screws, and tighten the nuts. (Metal conduit need to apply here)

Pole Bracket Mounting

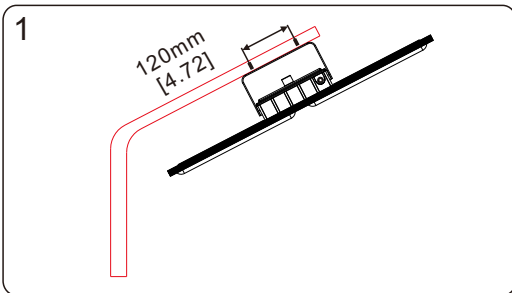


1. Drill 2x Ø10 holes for fixing screws.

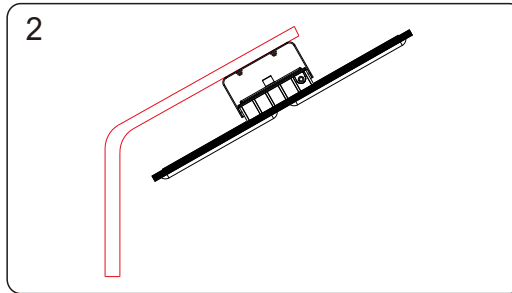


2. Insert 2x Ø10 fixing screws and weld them on the pole bracket with the fixture.

Wall Mounting

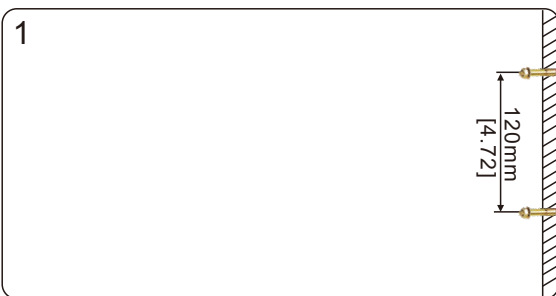

1. Drill 2x Ø10 hole for expanded screws, and fix them to the wall. (Horizontal distance: 171mm)

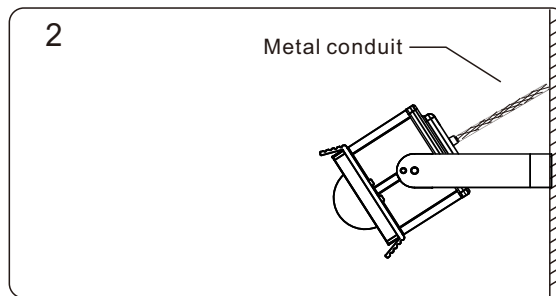

2. Install the fixture to wall and connect the wire to AC power. (Metal conduit needs to apply here)

Packing Information

Model	Quantity/Ctn	Length(cm)	Width (cm)	Height(cm)	Net weight(kg)	Gross weight (kg)
H2	1	69.1	41.3	29	4	9
H4	1	130	40	29.5	5.5	14.5

Series H Specification

Accessories



- Model: Ex-Junction01
Name: Junction Box
Material: Aircraft Aluminum A383



- Model: EX-Hook
Name: Installation Hook
Material: Aircraft Aluminum A383



- Model: Ex-Conduit01
Name: Metal Conduit
Material: Stainless Steel and Aluminum



- Model: EX-WPipe
Name: Winding Swing Pipe
Material: Iron with powder coating



- Model: EX-SPipe
Name: Winding Swing Pipe
Material: Iron with powder coating



- Model: Ex-D01
Name: Pendant Direction Adapter
Material: Aircraft Aluminum A383



- Model: Ex-PCH
Name: Pendant Chain
Material: Stainless Steel S30400